## **TECHNICAL SPECIFICATION 2022**

# THE NEW RANGE ROVER SPORT





### ENGINES AND TECHNICAL SPECIFICATION

Range Rover Sport features our most advanced powertrains yet, providing new levels of performance, efficiency and refinement. Choose from Electric Hybrid (PHEV), Mild Hybrid Electric Vehicle (MHEV), petrol or diesel.

1

#### **POWERTRAINS**

View the available powertrains, their fuel economy and specifications.

# 2

#### **DIMENSIONS AND CAPABILITIES**

View the ride height, turning circle and other capability specifications.

				DIESEL	
POWERTRAIN		_	D250	D300	D350
Transmission			Automatic	Automatic	Automatic
Driveline			All Wheel Drive (AWD)	All Wheel Drive (AWD)	All Wheel Drive (AWD)
Maximum power (PS (kW) / rpn	n)		249 (183) / 4.000	300 (221) / 4.000	350 (258) / 4.000
Maximum torque (Nm / rpm)			600 / 1.250-2.250	650 / 1.500-2.500	700 / 1.500-3.000
Capacity (cc)			2.997	2.997	2.997
No. of cylinders / Valves per cyl	inder		6 / 4	6/4	6 / 4
Cylinder layout			In-line	In-line	In-line
Bore / stroke (mm)		83 / 92,31	83 / 92,31	83 / 92,31	
Compression ratio (:1)		15,5	15,5	15,5	
FUEL ECONOMY - NEDC*					
	Urban	l/100km	From 9,8	From 9,8	From 9,8
NEDC Consumption	Extra Urban	l/100km	From 6,1	From 6,1	From 6,1
Consumption	Combined	l/100km	From 7,4	From 7,4	From 7,4
	Urban	g/km	From 259	From 259	From 259
NEDC CO <sub>2</sub> Emissions	Extra Urban	g/km	From 160	From 160	From 160
	Combined	g/km	From 196	From 196	From 196
Fuel tank capacity - useable litres			80	80	80
Selective Catalytic Reduction Fi	lter / Gasoline Particulate Filter (SCR	F / GPF)		•	•

<sup>■</sup> Standard.

<sup>\*</sup>The figures provided are NEDC calculated from official manufacturer's tests. Figures may vary according to environment and driving style. For comparison purposes only. Real-world figures may differ.

	DIESEL			
PERFORMANCE	D250	D300	D350	
Acceleration (secs) 0-100 km/h (0-60 mph) with Dynamic Launch	8,0 (7,5)	6,6 (6,3)	5,9 (5,6)	
Maximum speed km/h (mph)	206 (128)	218 (135)	234 (145)	
BRAKES				
Front type	Ventilated disc	Ventilated disc	Ventilated disc	
Front diameter (mm)	380	380	380	
Rear type	Ventilated disc	Ventilated disc	Ventilated disc	
Rear diameter (mm)	355	355	355	
Park Brake	Electric Park Brake (EPB) integrated into caliper	Electric Park Brake (EPB) integrated into caliper	Electric Park Brake (EPB) integrated into caliper	
WEIGHTS (kg)*				
Unladen weight (EU)**	2.390	2.390	2.435	
Unladen weight (DIN)†	2.315	2.315	2.360	
Gross Vehicle Weight (GVW)	3.220	3.220	3.220	
TOWING (kg)				
Unbraked trailer	750	750	750	
Maximum towing	3.500	3.500	3.500	
Maximum coupling point (nose weight)	150	150	150	
Maximum vehicle and trailer combination	6.720	6.720	6.720	
ROOF CARRYING (kg) <sup>††</sup>				
Maximum roof load (including cross bars)	100	100	100	

				DIESEL MHEV	
POWERTRAIN			D250	D300	D350
Mild Hybrid Electric Vehicle (M	HEV)		•	•	•
Transmission			Automatic	Automatic	Automatic
Driveline			All Wheel Drive (AWD)	All Wheel Drive (AWD)	All Wheel Drive (AWD)
Maximum power (PS (kW) / rpm	n)		249 (183) / 4.000	300 (221) / 4.000	350 (258) / 4.000
Maximum torque (Nm / rpm)			600 / 1.250-2.250	650 / 1.500-2.500	700 / 1.500-3.000
Capacity (cc)			2.997	2.997	2.997
No. of cylinders / Valves per cyl	inder		6 / 4	6 / 4	6/4
Cylinder layout			In-line	In-line	In-line
Bore / stroke (mm)			83 / 92,31	83 / 92,31	83 / 92,31
Compression ratio (:1)		15,5	15,5	15,5	
FUEL ECONOMY – WLTP*					
	Low	l/100km (mpg)	10,8-12,3 (26,2-23,0)	10,8-12,3 (26,2-23,0)	11,0-12,3 (25,7-23,0)
	Medium	l/100km (mpg)	7,7-8,1 (36,7-34,9)	7,7-8,1 (36,7-34,9)	7,7-8,1 (36,7-34,9)
WLTP Consumption	High	l/100km (mpg)	5,9-6,4 (47,9-44,1)	5,9-6,4 (47,9-44,1)	5,9-6,3 (47,9-44,8)
Consumption	Extra High	l/100km (mpg)	7,2-7,9 (39,2-35,8)	7,2-7,9 (39,2-35,8)	7,2-7,9 (39,2-35,8)
	Combined	l/100km (mpg)	7,4-8,1 (38,2-34,9)	7,4-8,1 (38,2-34,9)	7,4-8,0 (38,2-35,3)
	Low	 g/km	284-323	284-323	288-322
	Medium	g/km	202-211	202-211	203-211
WLTP CO <sub>2</sub> Emissions	High	g/km	154-167	154-167	155-166
	Extra High	g/km	189-207	189-207	189-207
	Combined	g/km	194-211	194-211	195-211
Fuel tank capacity - useable litre	es		80	80	80
Selective Catalytic Reduction Filter / Gasoline Particulate Filter (SCRF / GPF)		RF / GPF)	•	•	•

<sup>■</sup> Standard.

<sup>\*</sup>The figures provided are as a result of official manufacturer's tests in accordance with EU legislation. For comparison purposes only. Real-world figures may vary according to factors such as driving styles, environmental conditions, load, wheel fitment and accessories fitted.

	DIESEL MHEV			
PERFORMANCE	D250	D300	D350	
Acceleration (secs) 0-100 km/h (0-60 mph) with Dynamic Launch	8,0 (7,5)	6,6 (6,3)	5,9 (5,6)	
Maximum speed km/h (mph)	206 (128)	218 (135)	234 (145)	
BRAKES				
Front type	Ventilated disc	Ventilated disc	Ventilated disc	
Front diameter (mm)	380	380	380	
Rear type	Ventilated disc	Ventilated disc	Ventilated disc	
Rear diameter (mm)	355	355	355	
Park Brake	Electric Park Brake (EPB) integrated into brake caliper	Electric Park Brake (EPB) integrated into brake caliper	Electric Park Brake (EPB) integrated into brake caliper	
WEIGHTS (kg)*				
Unladen weight (EU)**	2.390	2.390	2.435	
Unladen weight (DIN) <sup>†</sup>	2.315	2.315	2.360	
Gross Vehicle Weight (GVW)	3.220	3.220	3.220	
TOWING (kg)				
Unbraked trailer	750	750	750	
Maximum towing	3.500	3.500	3.500	
Maximum coupling point (nose weight)	350	350	350	
Maximum vehicle and trailer combination	6.720	6.720	6.720	
ROOF CARRYING (kg) <sup>††</sup>				
Maximum roof load (including cross bars)	100	100	100	

			PETROL MHEV		
POWERTRAIN			P360	P400	
Mild Hybrid Electric Vehicle (MHEV)			•	•	
Transmission			Automatic	Automatic	
Driveline			All Wheel Drive (AWD)	All Wheel Drive (AWD)	
Maximum power (PS (kW) / rpm	)		360 (265) / 5.500-6.500	400 (294) / 5.500-6.500	
Maximum torque (Nm / rpm)			500 / 1.750-5.000	550 / 2.000-5.000	
Capacity (cc)			2.996	2.996	
No. of cylinders / Valves per cyli	nder		6 / 4	6 / 4	
Cylinder layout			In-line	In-line	
Bore / stroke (mm)			83 / 92,29	83 / 92,29	
Compression ratio (:1)			10,5	10,5	
FUEL ECONOMY – NEDC*					
	Urban	l/100km	From 12,2	From 12,2	
NEDC Consumption	Extra Urban	l/100km	From 7,8	From 7,8	
Consumption	Combined	l/100km	From 9,4	From 9,4	
	Urban	g/km	From 283	From 283	
NEDC CO <sub>2</sub> Emissions	Extra Urban	g/km	From 182	From 182	
CO <sub>2</sub> Lillissions	Combined	g/km	From 219	From 219	
FUEL ECONOMY – WLTP**					
	Low	l/100km (mpg)	14,0-14,5 (20,2-19,5)	14,1-14,5 (20,0-19,5)	
	Medium	l/100km (mpg)	9,4-9,9 (30,1-28,5)	9,4-9,9 (30,1-28,5)	
WLTP Consumption	High	l/100km (mpg)	7,8-8,3 (36,2-34,0)	7,8-8,3 (36,2-34,0)	
Consumption	Extra High	l/100km (mpg)	9,0-9,8 (31,4-28,8)	9,0-9,8 (31,4-28,8)	
	Combined	l/100km (mpg)	9,3-10,0 (30,4-28,2)	9,4-10,0 (30,1-28,2)	
	Low	g/km	318-328	319-328	
	Medium	 g/km	212-224	213-224	
WLTP CO₂ Emissions	High	g/km	176-188	177-188	
	Extra High	g/km	204-222	204-222	
	Combined	g/km	212-226	213-226	
Fuel tank capacity - useable litres			90	90	
Selective Catalytic Reduction Fil	ter / Gasoline Particulate Filter (SCR	F/GPF)			

#### ■ Standar

<sup>\*</sup>The figures provided are NEDC calculated from official manufacturer's tests. Figures may vary according to environment and driving style. For comparison purposes only. Real-world figures may differ. \*\*The figures provided are as a result of official manufacturer's tests in accordance with EU legislation. For comparison purposes only. Real-world figures may differ. CO<sub>2</sub> and fuel economy figures may vary according to factors such as driving styles, environmental conditions, load, wheel fitment and accessories fitted.

	PETROL MHEV		
PERFORMANCE	P360	P400	
Acceleration (secs) 0-100 km/h (0-60 mph) with Dynamic Launch	6,0 (5,7)	5,7 (5,4)	
Maximum speed km/h (mph)	225 (140)	242 (150)	
BRAKES			
Front type	Ventilated disc	Ventilated disc	
Front diameter (mm)	380	380	
Rear type	Ventilated disc	Ventilated disc	
Rear diameter (mm)	355	355	
Park Brake	Electric Park Brake (EPB) integrated into brake caliper		
WEIGHTS (kg)*			
Unladen weight (EU)**	2.340	2.385	
Unladen weight (DIN) <sup>†</sup>	2.265	2.310	
Gross Vehicle Weight (GVW)	3.220	3.220	
TOWING (kg)			
Unbraked trailer	750	750	
Maximum towing	3.500	3.500	
Maximum coupling point (nose weight)	350	350	
Maximum vehicle and trailer combination	6.720	6.720	
ROOF CARRYING (kg) <sup>††</sup>			
Maximum roof load (including cross bars)	100	100	

			PETROL PHEV		
POWERTRAIN			P440e	P510e	
Plug-in Hybrid Electric Vehicle (PF	HEV)				
Fransmission			Automatic	Automatic	
Driveline			All Wheel Drive (AWD)	All Wheel Drive (AWD)	
Maximum power (PS (kW) / rpm)			440 (324) / 5.500-6.500	510 (375) / 5.500-6.500	
laximum torque (Nm / rpm)			620 / 1.500-5.000	700 / 1.500-5.000	
Capacity (cc)			2.996	2.996	
No. of cylinders / Valves per cylind	der		6 / 4	6 / 4	
Cylinder layout			In-line	In-line	
Bore / stroke (mm)			83 / 92,29	83 / 92,29	
Compression ratio (:1)			10,5	10,5	
FUEL ECONOMY – NEDC*					
	Urban	l/100km		_	
IEDC Consumption	Extra Urban	l/100km		-	
Consumption	Combined	l/100km	From 1,6	From 1,6	
	Urban	 g/km		-	
NEDC CO <sub>2</sub> Emissions	Extra Urban	g/km	_	-	
	Combined	g/km	From 37	From 37	
FUEL ECONOMY – WLTP**					
	Low	l/100km (mpg)			
	Medium	l/100km (mpg)	<del>-</del>	_	
NLTP	High	l/100km (mpg)	-	-	
Consumption	Extra High	l/100km (mpg)	-	_	
	Combined	l/100km (mpg)	0,8-0,9 (353,1-313,9)	0,8-0,9 (353,1-313,9)	
	Low	g/km		-	
WLTP CO <sub>2</sub> Emissions	Medium	g/km		-	
	High	g/km		_	
	Extra High	g/km	-	-	
	Combined	g/km	18-20	18-20	
Fuel tank capacity - useable litres			71,5	71,5	
Selective Catalytic Reduction Filter / Gasoline Particulate Filter (SCRF / GPF)			•		

<sup>■</sup> Standard - Not Available.

<sup>\*</sup>The figures provided are NEDC calculated from official manufacturer's tests. Figures may vary according to environment and driving style. For comparison purposes only. Real-world figures may differ. \*\*The figures provided are as a result of official manufacturer's tests in accordance with EU legislation with a fully charged battery. For comparison purposes only. Real-world figures may differ. CO<sub>2</sub>, fuel economy, energy consumption and range figures may vary according to factors such as driving styles, environmental conditions, load, wheel fitment, accessories fitted, actual route and battery condition. Range figures are based upon production vehicle over a standardised route.

	PETROL PHEV			
BATTERY AND CHARGING TIMES	P440e	P510e		
Home Charger / Wall box 7kW	5h 00m to 100%	5h 00m to 100%		
Rapid DC Charger 50kW	40 mins to 80%	40 mins to 80%		
Domestic Plug 2,3kW	15h 00m to 100%	15h 00m to 100%		
Battery capacity Total (Usable) kWh	38,2 (31,8)	38,2 (31,8)		
Charging cable length (m)	5	5		
PERFORMANCE				
Acceleration (secs) 0-100 km/h (0-60 mph)	5,8 (5,5)	5,4 (5,2)		
Maximum speed km/h (mph)	225 (140)	242 (150)		
ELECTRIC MOTOR DATA				
Maximum speed km/h (mph)	140 (87)	140 (87)		
EV Range Class A Combined (NEDC2*) km (miles)	125 (78)	125 (78)		
EV Range Combined (WLTP**) km (miles	114 (71)	113 (70)		
BRAKES				
Front type	Ventilated disc	Ventilated disc		
Front diameter (mm)	400	400		
Rear type	Ventilated disc	Ventilated disc		
Rear diameter (mm)	370	370		
Park Brake	Electric Park Brake (EPB) integrated into brake caliper			
WEIGHTS (kg) <sup>†</sup>				
Unladen weight (EU) <sup>††</sup>	2.735	2.810		
Unladen weight (DIN)‡	2.660	2.735		
Gross Vehicle Weight (GVW)	3.450	3.450		
TOWING (kg)				
Unbraked trailer	750	750		
Maximum towing	3.000	3.000		
Maximum coupling point (nose weight)	300	300		
Maximum vehicle and trailer combination	6.450	6.450		
ROOF CARRYING (kg)**				
Maximum roof load (including cross bars)	100	100		

<sup>\*</sup>The figures provided are NEDC2 calculated from official manufacturer's WLTP tests in accordance with EU legislation with a fully charged battery. For comparison purposes only. Real-world figures may differ. CO<sub>2</sub>, fuel economy, energy consumption and range figures may vary according to factors such as driving styles, environmental conditions, load, wheel fitment and accessories fitted. NEDC2 are figures calculated using a Government formula from WLTP figures equivalent to what they would have been under the old NEDC test. The correct tax treatment can then. \*\*The figures provided are as a result of official manufacturer's tests in accordance with EU legislation with a fully charged battery. For comparison purposes only. Real-world figures may differ. CO<sub>2</sub>, fuel economy, energy consumption and range figures may vary according to factors such as driving styles, environmental conditions, load, wheel fitment, accessories fitted, actual route and battery condition. Range figures are based upon production vehicle over a standardised route. †Weights reflect vehicles to standard specifications. Optional extras increase weight. †Includes a 75kg driver, full fluids and 90% fuel. ‡Includes full fluids and 90% fuel. ‡Roof carrying is only available with fixed and sliding panoramic roofs.

POWERTRAIN Transmission			P530	
			Automatic	
Driveline			All Wheel Drive (AWD)	
Maximum power (PS (kW) / rpm)			530 (390) / 5.500-6.000	
Maximum torque (Nm / rpm)			750 / 1.800-4.600	
Capacity (cc)			4.395	
No. of cylinders / Valves per cylinder			8 / 4	
Cylinder layout			Longitudinal V	
Bore / stroke (mm)			89 / 88,3	
Compression ratio (:1)			10,5	
FUEL ECONOMY – NEDC*				
	Urban	l/100km	From 16,2	
NEDC Consumption	Extra Urban	l/100km	From 9,2	
Consumption	Combined	l/100km	From 11,8	
	Urban	g/km	From 380	
NEDC CO <sub>2</sub> Emissions	Extra Urban	g/km	From 214	
	Combined	g/km	From 275	
FUEL ECONOMY – WLTP**				
	Low	l/100km (mpg)	19,0-19,4 (14,9-14,6)	
	Medium	l/100km (mpg)	10,9-11.5 (25,9-24,6)	
WLTP Consumption	High	l/100km (mpg)	9,1-9,5 (31,0-29,7)	
Consumption	Extra High	l/100km (mpg)	10,3-10,8 (27,4-26,2)	
	Combined	l/100km (mpg)	11,2-11,7 (25,2-24,1)	
	Low	g/km	431-442	
NA/I TO	Medium	g/km	247-261	
WLTP CO <sub>2</sub> Emissions	High	g/km	206-217	
2	Extra High	g/km	234-244	
	Combined	g/km	254-266	
Fuel tank capacity - useable litres			90	
Selective Catalytic Reduction Filter / G	asoline Particulate Filter (SCRF	F / GPF)		

#### ■ Standar

<sup>\*</sup>The figures provided are NEDC calculated from official manufacturer's tests. Figures may vary according to environment and driving style. For comparison purposes only. Real-world figures may differ. \*\*The figures provided are as a result of official manufacturer's tests in accordance with EU legislation. For comparison purposes only. Real-world figures may differ. CO<sub>2</sub> and fuel economy figures may vary according to factors such as driving styles, environmental conditions, load, wheel fitment and accessories fitted.

	PETROL V8
PERFORMANCE	P530
Acceleration (secs) 0-100 km/h (0-60 mph) with Dynamic Launch	4,5 (4,3)
Maximum speed km/h (mph)	250 (155)
BRAKES	
Front type	Ventilated disc
Front diameter (mm)	400
Rear type	Ventilated disc
Rear diameter (mm)	370
Park Brake	Electric Park Brake (EPB) integrated into brake caliper
WEIGHTS (kg)*	
Unladen weight (EU)**	2.505
Unladen weight (DIN) <sup>†</sup>	2.430
Gross Vehicle Weight (GVW)	3.220
TOWING (kg)	
Unbraked trailer	750
Maximum towing	3.500
Maximum coupling point (nose weight)	350
Maximum vehicle and trailer combination	6.720
ROOF CARRYING (kg)††	
Maximum roof load (including cross bars)	100

#### THE NEW RANGE ROVER SPORT DIMENSIONS AND CAPABILITIES

#### **VEHICLE HEIGHT**

Maximum height 1.820mm

#### **OBSTACLE CLEARANCE**

Off-road height 281mm / 274mm<sup>†</sup> Standard ride height 216mm / 209mm<sup>†</sup>

#### TURNING CIRCLE

Kerb-to-kerb Two wheel steering 12,53m Kerb-to-kerb Four wheel steering 10,95m Wall-to-wall Two wheel steering 12,73m Wall-to-wall Four wheel steering 11.42m Turns lock-to-lock 2,8

#### WADING DEPTH

Maximum wading depth 900mm

#### HEADROOM

Maximum front row headroom 998mm

Maximum second row headroom 982mm

#### LEGROOM

Maximum front row legroom 1.024mm Maximum second row legroom 961mm

#### LOADSPACE CAPACITY\*\*

Height 844mm

Width 1.400mm

Width between arches 1.103mm

Length behind first row 1.827mm

Maximum loadspace volume behind first row

Dry\* 1.491 litres

Wet\*\* 1.860 litres

Length behind second row 970mm

Maximum loadspace volume behind second row Dry\* 647 litres

Wet\*\* 835 litres




Front wheel track 1.702mm



Rear wheel track 1.704mm



Wheelbase 2.997mm

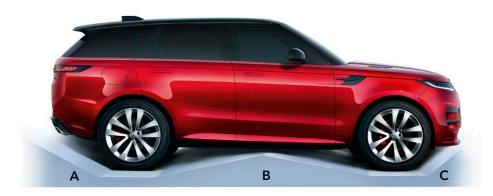

A
Ride Height Departure Angle
Off-road 30,0°
Standard 24,9°

B C

Ramp Angle Ap

26,9° / 24,5°† 33

21,5° / 19,1°† 26

Approach Angle 33,0° / 29,7°<sup>††</sup> 26,1° / 22,5°<sup>††</sup>







<sup>\*</sup>Dry: Volume as measured with VDA-compliant solid blocks (200mm x 50mm x 100mm).

<sup>\*\*</sup>Wet: Volume as measured by simulating the loadspace filled with liquid.

<sup>†</sup>On PHEV models. ††On Dynamic models.